

# 2x2plus specs



## Power for everyone

The 2x2plus is a versatile 2U server that brings the flexibility of the disguise platform to smaller shows and fixed installations.

## Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty


## Bundled accessories

Power Cable (IEC UK/EU/US), 2x Single Link DP to DVI adapters, Getting Started Guide.

## Physical specifications

<b>Packed Dimensions:</b>	<b>W</b> 575mm 22.64"	<b>H</b> 210mm 8.27"	<b>D</b> 640mm 25.2"
<b>Unit Dimensions:</b>	<b>W</b> 430mm 16.93"	<b>H</b> 88mm 3.5"	<b>D</b> 495mm 19.48"
<b>Unit + Rack Handles</b>	<b>W</b> 482mm 19"		<b>D</b> 520mm 20.5"
<b>Rack Depth:</b>			<b>D</b> 485mm 19.09"
<b>Unit Weight:</b>		11.9kg	26.3lbs
<b>Packed Unit Weight:</b>		17kg	37.5lbs

# 2x2plus specs

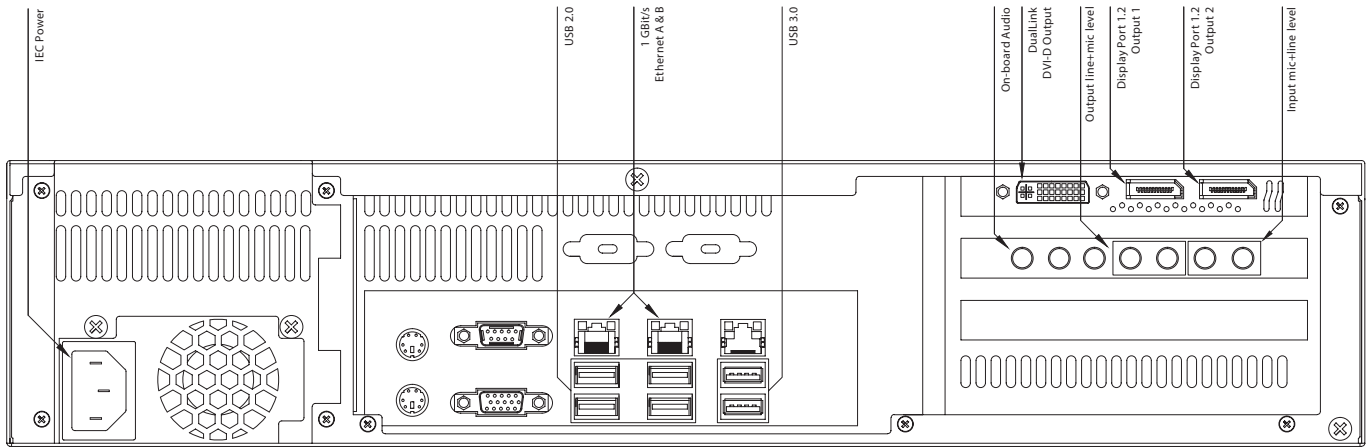

## Hardware specifications

**Voltage:** 100-240V, 50-60Hz

**Power Consumption:**

350W @ 230V (max)

**Operating System:** Windows 8.1

Embedded Pro

**CPU:** Xeon Quad-Core 3.7Ghz

**Memory:** 8GB DDR3 RAM

**Environmental Tolerances:**

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

**Mounting System:**

2U 19" rack mount

**Audio:** On-board Audio or Pro Audio

**Storage:** 1× 80GB SSD

(Internal System Drive, Restore Drive)

1× 512GB SSD

## System connectivity I/O

**Video Output:**

1× DVI DualLink (GUI)

2× DisplayPort 1.2 (2560 × 1600 max)

**Video Input:**

Choice of:

No capture card fitted (default)

or

3× HD-SDI or 2× 3G-SDI

or

1× DVI

**Audio In/Out:**

Choice of:

On-board audio (default)

or

Pro-Audio

2× Balanced XLR In/Out

1× 1/4" Headphones Jack

ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

**Ethernet:** 2 × 1 Gigabit LAN

**Data/Peripherals:**

6× USB 2.0

2× USB 3.0